

SOLVAY SPECIALTY POLYMERS
More Products with More Performance™


Galden® LS & HS Vapor Phase Soldering Fluids



Galden® LS and HS

Vapor Phase Soldering Fluids

Galden® LS/HS is a line of fully fluorinated fluids specifically designed for the Vapor Phase Soldering process. The narrow molecular weight distribution as well as the very strong carbon-fluorine bond and the flexible ether link provide the properties which make Galden® LS/HS ideal for use in VPS.



Features	Benefits
Wide choice of grades with different boiling point	Widest operating temperature range to optimize VPS process
Narrow molecular weight distribution	Maximum process stability and repeatability No boiling point drift
Low heat of vaporization	Rapid and residue free drying
Vapor density greater than air	Pre-heating and heating processes take place in an inert atmosphere
Excellent thermal and chemical stability	No corrosion or reaction with materials of construction
Good compatibility with materials	No formation of decomposition residues
No flash or fire points	Enhanced safety
No auto ignition point	Safe to use at high temperature
No explosion hazards	

Lead free and vapor phase soldering

RoHS (Restriction of Hazardous Substances) is also known as "lead free" but this law deals with other five substances as well:

- Lead
- Mercury
- Cadmium
- Hexavalent Chromium
- Polybrominated biphenyls (PBBs)
- Polybrominated diphenyl ethers (PBDEs)

Particular emphasis is being placed on lead; lead is a concern when released to the environment as it can cause damage to the human body, it can also accumulate in the environment and has acute and chronic effects on plants,


animals and microorganism. Because of RoHS, manufacturers of electronic equipment will have to produce and deliver lead-free equipment; one of the first evidence of this has been the development of lead free printed circuit boards (PCBs). Solder traditionally used ~60% of tin (Sn) and ~40% of lead (Pb), now alternative solder materials have been studied, the most common replacements for lead are silver (Ag), Copper (Cu) and Bismuth (Bi). These alternative materials, however, bring a main challenge: higher melting temperature. Traditional tin/lead solders melt at ~180°C while lead free solder melts at ~227°C. Soldering temperatures, as well as heating issues, are ongoing concerns for PCBs assemblers.

Galden® LS and HS grades for vapor phase soldering offer the right lead free process solution:

- Galden® LS and HS fluids are RoHS compliant and can be sold in Europe
- Galden® LS and HS fluids offer the widest temperature range for lead free solders up to 260 °C
- Galden® LS and HS fluids precise vapor temperatures eliminate overheating

Vapor phase soldering (Typical Properties @ 25 °C)

Properties	Units	LS200	LS215	LS230	HS240	HS260
Boiling point	°C	200	215	230	240	260
Density	g/cm ³	1.79	1.80	1.82	1.82	1.83
Kinematic viscosity	cSt	2.50	3.80	4.40	5.30	7.00
Vapor pressure	Pa	21	12	3.4	1	1
Specific heat	J/Kg·°C	973	973	973	973	973
Heat of vap. @ boiling point	J/g	63	63	63	63	63
Thermal conductivity	W/m·°C	0.07	0.07	0.07	0.07	0.07
Coefficient of expansion	cm ³ /cm ³ ·°C	0.0011	0.0011	0.0011	0.0011	0.0011
Surface tension	dyne/cm	19	20	20	20	20
Dielectric strength	kV (2.54 mm gap)	40	40	40	40	40
Dielectric constant		2.1	2.1	2.1	2.1	2.1
Volume resistivity	Ohm·cm	10 ¹⁵	10 ¹⁵	10 ¹⁵	10 ¹⁵	10 ¹⁵
Average molecular weight	amu	870	950	1,020	1,085	1,210

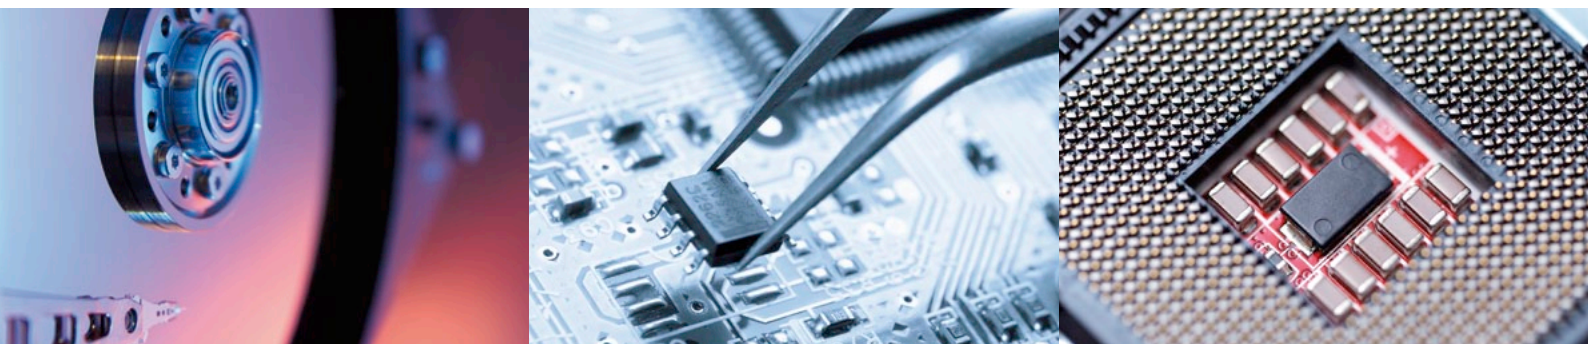

www.SolvaySpecialtyPolymers.com

Contact Solvay Specialty Polymers

Europe, Middle East and Africa SpecialtyPolymers.EMEA@solvay.com
Americas SpecialtyPolymers.Americas@solvay.com
Asia and Australia SpecialtyPolymers.Asia@solvay.com

Material Safety Data Sheets (MSDS) for products of Solvay Specialty Polymers are available upon request from your sales representative or by emailing us at specialtypolymers@solvay.com. Always consult the appropriate MSDS before using any of our products. Solvay Specialty Polymers is comprised of the activities of the Solvay Advanced Polymers, Solvay Solexis and Solvay Padanaplast companies along with the Ixan® and Diofan® PVDC products lines. To our actual knowledge, the information contained herein is accurate as of the date of this document. However the companies that comprise Solvay Specialty Polymers and none of their affiliates make any warranty, express or implied, or accepts any liability in connection with this information or its use. Only products designated as part of the Solviva® family of biomaterials may be considered as candidates for implantable medical devices; Solvay Specialty Polymers does not allow or support the use of any other products in any implant applications. This information is for use by technically skilled persons at their own discretion and risk and does not relate to the use of this product in combination with any other substance or any other process. This is not a license under any patent or other proprietary right. The user alone must finally determine suitability of any information or material for any contemplated use in compliance with applicable law, the manner of use and whether any patents are infringed. This information gives typical properties only and is not to be used for specification purposes. All companies comprising Solvay Specialty Polymers reserve the right to make additions, deletions or modifications to the information at any time without prior notification.

All trademarks and registered trademarks are property of the companies that comprise the Solvay Group or their respective owners.
© 2012, Solvay Specialty Polymers. All rights reserved.



a Passion for Progress®